

PEDESTAL SPOT WELDER – 25 KVA ROCKER ARM & 50 KVA PNEUMATIC LINEAR DESCENT



AP Automation Pedestal Spot Welders

- Solid State controls
- Variable throat depth: 6" - 17-1/4"
- Water-Cooled
- Standard Arms included
- Heavy Duty Chassis
- One Year Warranty
- 50% Duty Cycle
- 230/460 V Single Phase
- Stroke: 2" - 4" (depending on throat depth)



Part No. 658251031
Call for Price
25 KVA PNEUMATIC ROCKER ARM
487 lb

Adjustable tip pressure (by air pressure)

1700 lbs. Capacity
Welding Capacity:
 Sheet Metal 6 ga. to 6 ga.
 Rod Diameter 5/8" to 5/8"
Input Power: Single Phase
 230 V. 150 Amp Fuse
 460 V. 70 Amp Fuse
Maximum electrode force @ 250 PSI: 250 daN

FOOT SWITCH




208/230V Part No. 659501022
460V Part No. 659501023
Call for Price
50 KVA PNEUMATIC LINEAR DESCENT
562 lb

Adjustable tip pressure (up to 300 lbs. downward force)

3800 lbs. Capacity
Welding Capacity:
 Sheet Metal 1/4" to 1/4"
 Rod Diameter 5/8" to 5/8"
Input Power: Single Phase
 230 V. 250 Amp Fuse
 460 V. 125 Amp Fuse
Maximum electrode force @ 100 PSI: 570 daN


FOOT SWITCH

Control Panel for Pneumatic Spot Welders


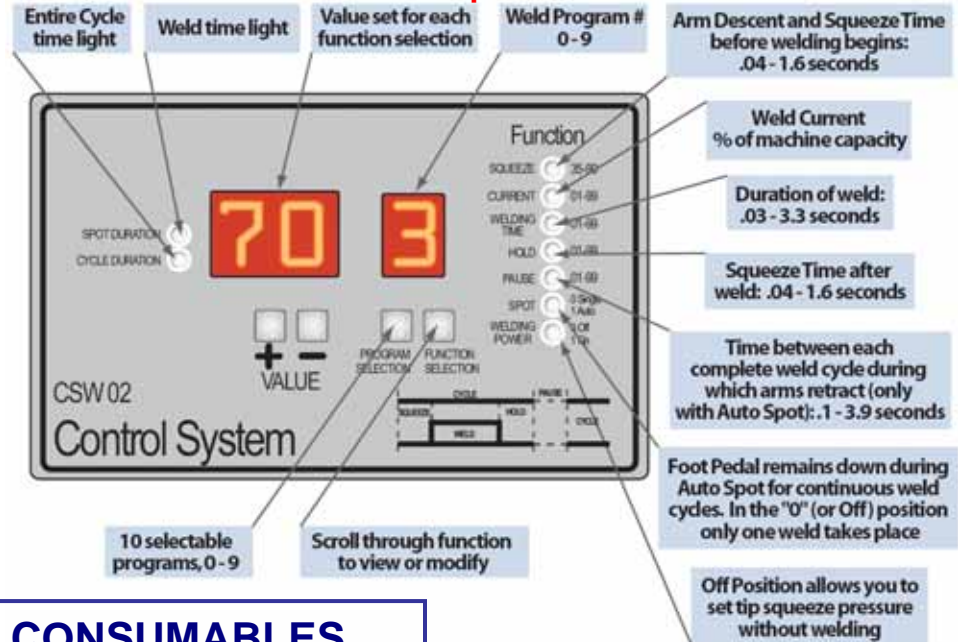


SPOT WELDER CONSUMABLES

Male Cap Electrodes and Female Cap Adaptors

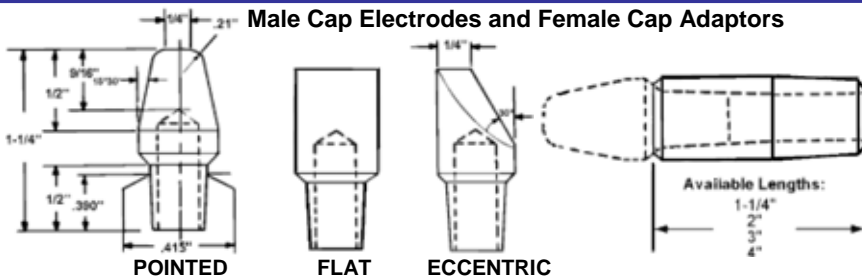

2" Straight Electrodes with Tapered Shanks

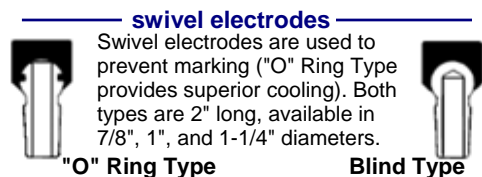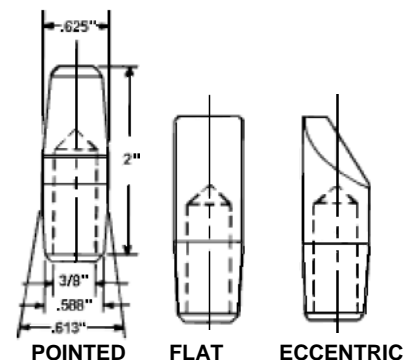

CALL FOR PART NUMBERS AND PRICES FOR THESE AND OTHER CONSUMABLES AND ACCESSORIES